


Digital Probe Tester
Model SK-6592

kaise

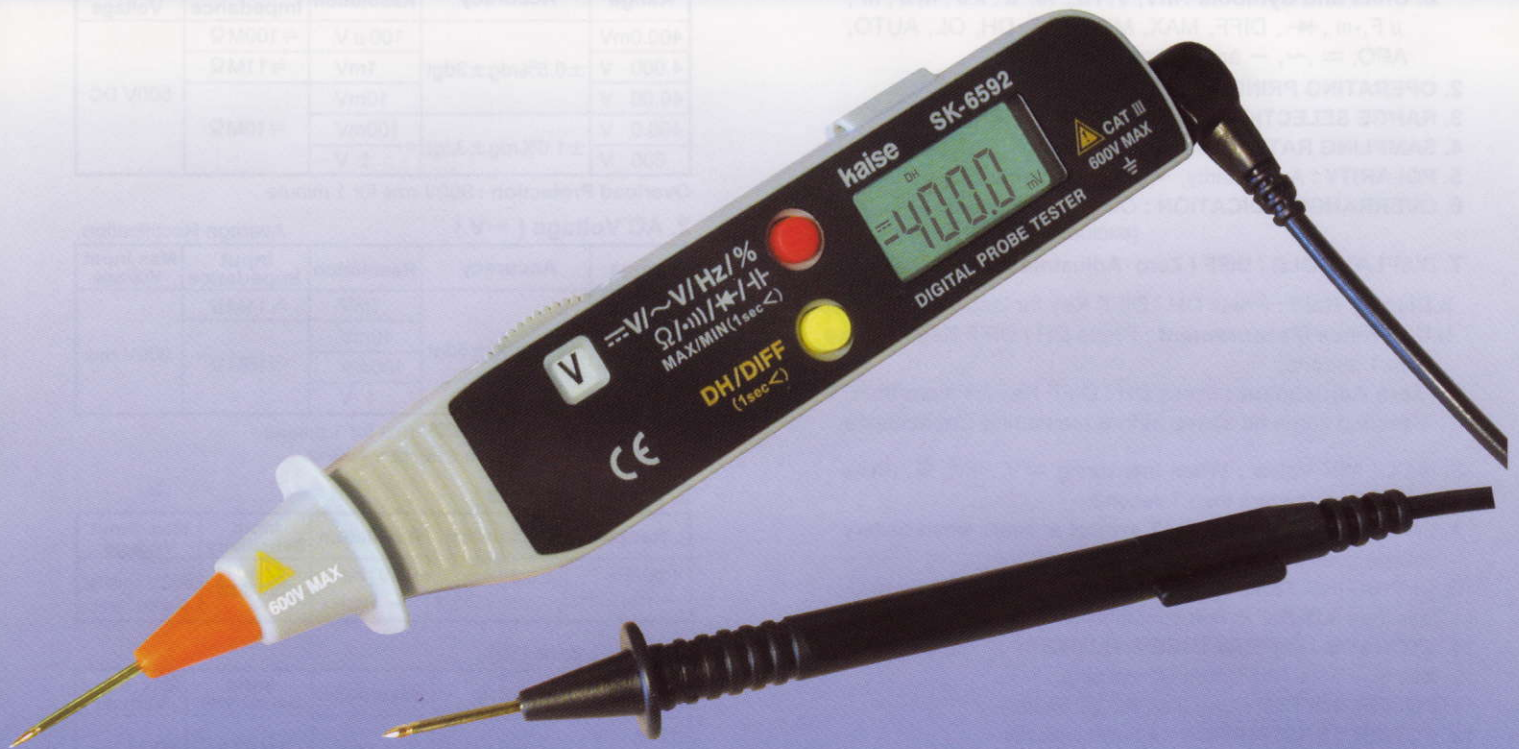

Exactly to the point!

FEATURES

- ◆ Easy Operation and Reading !
- ◆ AC/DC Voltage, Frequency, Duty Cycle !
- ◆ Resistance, Continuity, Diode, Capacitance !
- ◆ MAX/MIN, Difference and Display Hold !
- ◆ AUTO POWER OFF : Prevents battery consumption !
- ◆ Safety Design : CE IEC61010-1 CATⅢ600V and EMC !

◆ Measurements

AC/DC Voltage

Frequency

Duty Cycle

Resistance

Continuity Tests

Diode Tests

Capacitance

◆ Functions

Max / Min

Difference

Display Hold

Auto Power Off

<http://www.kaise.com>

GENERAL SPECIFICATIONS

1. DISPLAY :

- a. **Numerical Display** : 4000 count LCD, 8mm high.
 b. **Units and Symbols** : mV, V, Hz, %, Ω , k Ω , M Ω , nF, μ F, \cdot , \rightarrow , \leftarrow , DIFF, MAX, MIN, BAT, DH, OL, AUTO, APO, \approx , \sim , $-$ and decimal point.

2. OPERATING PRINCIPLE : $\Sigma \Delta$

3. RANGE SELECTION : Autoranging.

4. SAMPLING RATE : 2 times per second.

5. POLARITY : Autopolarity, $-$ symbol when minus.

6. OVERRANGE INDICATION : OL symbol appears. (excluding DC/AC 600V)

7. DISPLAY HOLD / DIFF (Zero Adjustment) :

- a. **Display Hold** : Press DH / DIFF Key for less than 0.5 second.
 b. **Difference Measurement** : Press DH / DIFF Key for more than 1 second.
 c. **Zero Adjustment** : Press DH / DIFF Key for more than 1 second same as above before measuring Capacitance.

8. MAX / MIN Value : When measuring \approx V, \sim V, Ω , press SHIFT Key for more than 1 second.

9. BATTERY WARNING : BAT symbol appears when battery voltage goes down below approx. 2.4V.

10. OPERATING TEMPERATURE & HUMIDITY : 0°C to 40°C, less than 80%RH in non-condensing.

11. STORAGE TEMPERATURE & HUMIDITY : -20°C to 60°C, less than 80% RH in non-condensing.

12. POWER SUPPLY : One 3V CR2032 Battery.

13. POWER CONSUMPTION : 4.5mW typically.

14. BATTERY LIFE : 70 hours continuous operation.

15. AUTO POWER OFF : Power turns off automatically in 15 minutes after any switch operation.

16. DIELECTRIC STRENGTH : 5.55kV rms for one minute between Input Terminal and Cases.

17. OVERLOAD PROTECTION :

- a. V : 900V DC or AC rms max. for 1 minute.
(400mV Range is 600V rms)
 b. Ω / \cdot / \rightarrow / \leftarrow / \uparrow : 300V rms max. for 1 minute.

18. DIMENSIONS & WEIGHT : 179(H) x 28(W) x 20(D)mm, 60g

19. SAFETY LEVEL : IEC-61010-1 Overvoltage CAT. III 600V and EMC Test passed.

20. ACCESSORY : One Black Test Lead, Battery (Installed), Carrying Case, Instruction Manual

21. OPTIONAL ACCESSORY : 940 Alligator Clips.

MEASUREMENT SPECIFICATIONS

(23°C \pm 5°C, less than 80% RH in non-condensing)

1. DC Voltage (\approx V)

Range	Accuracy	Resolution	Input Impedance	Max Input Voltage
400.0mV	$\pm 0.5\%rdg \pm 3dgt$	100 μ V	$\approx 100M\Omega$	600V DC
4.000 V		1mV	$\approx 11M\Omega$	
40.00 V		10mV	$\approx 10M\Omega$	
400.0 V		100mV		
600 V	$\pm 1.0\%rdg \pm 3dgt$	1 V		

Overload Protection : 900V rms for 1 minute

2. AC Voltage (\sim V)

Average Rectification

Range	Accuracy	Resolution	Input Impedance	Max Input Voltage
4.000 V	$\pm 1.5\%rdg \pm 5dgt$	1mV	$\approx 11M\Omega$	600V rms
40.00 V		10mV	$\approx 10M\Omega$	
400.0 V		100mV		
600 V		1 V		

Overload Protection : 900V rms for 1 minute

Frequency Response : 50Hz \sim 400Hz

3. Frequency (Hz)

Range	Accuracy	Resolution	Input Sensitivity	Max. Input Voltage
1.000Hz \sim 100.0kHz	$\pm 0.2\%rdg$ $\pm 2dgt$	0.001Hz \sim 100Hz	3V RMS	600V rms or 2×10^6 VHz

4. Duty Cycle (%)

Range	Accuracy	Resolution	Input Sensitivity	Max. Input Voltage
0.0% \sim 99.9%	$\pm 0.5\%rdg \pm 5dgt$	0.1%	3V RMS	600V rms

Frequency Scope : 1Hz \sim 1kHz

5. Resistance (Ω)

Range	Accuracy	Resolution	Test Current	Open Circuit Voltage
400.0 Ω	$\pm 1.5\%rdg \pm 4dgt$	0.1 Ω	$\leq 0.2mA$	$\approx 0.44V$
4.000k Ω		1 Ω	$\leq 50 \mu A$	
40.00k Ω		10 Ω	$\leq 5 \mu A$	
400.0k Ω		100 Ω	$\leq 0.5 \mu A$	
4.000M Ω	$\pm 3.0\%rdg \pm 3dgt$	1 k Ω	$\leq 50nA$	
40.00M Ω		10 k Ω		

Overload Protection : 300V rms

6. Continuity Tests (\cdot)

Range	Buzzer Sound	Response Time	Open Circuit Voltage	Overload Protection
400.0 Ω	less than 60 Ω	1m sec	$\approx 0.44V$	300V rms


7. Diode Tests (\rightarrow)

Range	Accuracy	Open Circuit Voltage	Test Current	Overload Protection
1.000V	$\pm 5.0\%rdg \pm 3dgt$	$\leq 1.7V$	$\leq 0.7mA$	300V rms

8. Capacitance (\uparrow)

Range	Resolution	Accuracy	Test Voltage
50.00nF	10pF	$\pm 5.0\%rdg \pm 10dgt$	$\leq 1.7V$
500.0nF	100pF		
5.000 μ F	1nF		
50.00 μ F	10nF		
100.0 μ F	100nF		

Overload Protection : 300V rms

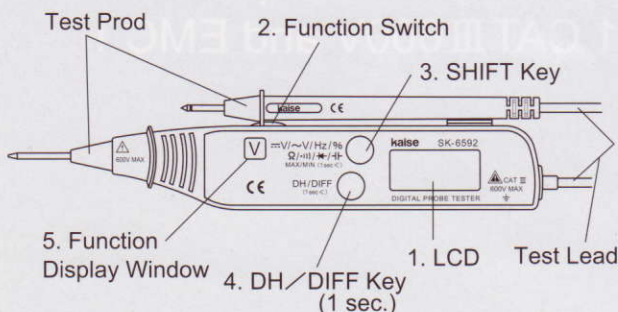

DISTRIBUTOR

KAISE CORPORATION

422 Oaza Hayashinogo, Ueda City, Nagano Pref.,
386-0156 Japan

TELEPHONE : +81-268-35-1600 (REP.)

FAX : +81-268-35-1603

E-mail : sales@kaise.com

http://www.kaise.com

70-0201-6592-1 0402