

OSCILLOSCOPE TEST LEED SET 100-72


UNPACKING AND INSPECTIONS

Confirm if the following items are contained in the package in good condition. If there is any damage or missing items, ask your local dealer for replacement.

1. 100-40R Test Leads (Red) — 2 pce.
2. 100-40B Test Lead (Black) — 1 pce.
3. 795R Test Pins (Red) — 2 pce.
4. 795B Test Pin (Black) — 1 pce.
5. 942B Alligator Clip (Black) — 1 pce.

MEASUREMENT PROCEDURES

Insert test pins or alligator clip firmly to the test leads plugs.

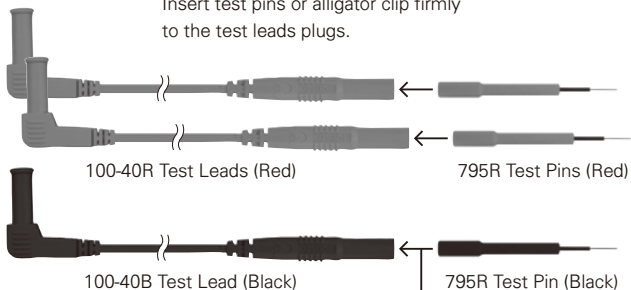

SPECIFICATIONS

- 100-40R, 100-40B Test Leads : lead length : 1.6m,
Max. Voltage : 1000V, Max. Current : 10A
- 795R, 795B Test Pins : tip dia. : $\varnothing 0.5\text{mm}$,
Max. Voltage : 50V, Max. Current : 1A
- 942B Alligator Clip : jaw dia. : 20mm,
Max. Voltage : 1000V, Max. Current : 20A



942B Alligator Clip (Black)
(for car body grounding)

KAISE CORPORATION

422 Hayashinogo, Ueda City, Nagano Pref., 386-0156 Japan

Tel : +81-268-35-1601 Fax : +81-268-35-1603 E-mail : sales@kaise.com

70-1201-0072-1 1502